



Wells HVAC Supply
930 W 21st St, Chicago, IL 60608
Tel: (312) 800-8455
Website: www.wellshvacsupply.com

SUBMITTAL DATA SHEET

Duct Heat Pump System

Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit #: _____
Drawing #: _____

Inquiry: sales@wellshvacsupply.com

Set Code
Indoor unit code 22023010006103
Outdoor unit code 22023011003834
22023116000181

Set Model
Indoor unit model WSMA-60HFMD
Outdoor unit model WSMA-60HFMO

Certified
AHRI
CSA
C US



SYSTEM PERFORMANCE DATA

Power supply			
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph., 60Hz	
Voltage Range	(V)	187-253	
Electrical			
Minimum circuit ampacity(Outdoor)	(A)	39.0	
Max.fuse(Outdoor)	(A)	50.0	
Connection wiring	14AWG*2	Stranded, shielded	
Cooling			
Capacity	(Btu/h)	59000(12000-62000)	
Power Input	(W)	5700(1100-6346)	
Current	(A)	25.0(4.8-28)	
SEER2	(Btu/W)	17.0	
EER2	(Btu/W)	10.3	
Heating			
Capacity	(Btu/h)	60000(12000-60000)	
Power Input	(W)	5000(1500-5000)	
Current	(A)	22.0(6.6-22.5)	
HSPF2-4	(Btu/W)	8.4	
HSPF2-5	(Btu/W)	6.5	
COP	W/W	3.52	
Heat at 17F(H32)	(Btu/h)	34400	
Heat at 5F(H42)	(Btu/h)	31000	
COP at 5F(H42)	W/W	2.00	

REFRIGERANT PIPE DATA

Throttle type	Indoor unit	N/A
Design pressure	Outdoor unit	EXV+Throttle valve
Refrigerant Type	(PSIG)	550/340
Refrigerant charge		R410A
Refrigerant precharge	oz	169.32
Additional charge for each ft	(ft)	25.0
Additional charge for each m	(oz/ft)	7.5
Liquid side/ Gas side(indoor)	(m)	0.32
Liquid side/ Gas side(outdoor)	(g/m)	30.0
Max. pipe length	(inch)	3/8"/7/8"
Max. difference in level	(mm)	9.52/22
Connection method	(inch)	3/8"/7/8"
Indoor(cooling)	(mm)	9.52/22
Indoor(heating)	(ft)	213.3
Outdoor(cooling)	(m)	65.0
Outdoor(heating)	(ft)	98.4
	(m)	30.0
		Flared
Indoor(cooling)	(Deg. °F)	62 ~ 90
Indoor(heating)	(Deg. °C)	17 ~ 32
Outdoor(cooling)	(Deg. °F)	32 ~ 86
Outdoor(heating)	(Deg. °C)	0 ~ 30
	(Deg. °F)	5 ~ 122
	(Deg. °C)	-15 ~ 50
	(Deg. °F)	-13 ~ 75
	(Deg. °C)	-25 ~ 24


INDOOR UNIT DATA

Indoor fan motor			
Model			ZKFN-700-8-1
Qty			1
Input	(W)		420.00
Output	(W)		700.0
RLA	(A)		0.0
Speed(Hi/Mi/Lo)	(r/min)		1060/910/790
Air flow & Noise level			
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	12.94/2155.88/1709.41/1261.76	
Indoor noise level (Hi/Med/Lo)	[dB(A)]	57/54/51	
Dehumidification	(L/H)	5.58	
Indoor unit			
Dimension (WxDxH)	(inch)	55.12x33.78x18.11	
	(mm)	1400x858x460	
Packing(WxDxH)	(inch)	63.19x35.83x21.06	
	(mm)	1605x910x535	
Net/Gross weight	(lbs.)	174.60/200.40	
	(kg)	79.2/90.9	

OUTDOOR UNIT DATA

Compressor			
Type			ROTARY
Model			KTQ420D1UMU
Brand			GMCC
Capacity	(Btu/h)		46744
Input	(W)		3700
Rated current (RLA)	(A)		25
Refrigerant oil/oil charge	(ml)		VG74/1400
Outdoor fan motor			
Model			ZKFN-85-8-22-5
Qty			2
Input	(W)		126.0
Output	(W)		85
RLA	(A)		1.5
Speed	(r/min)		850/750/650
Air flow & Noise level			
Outdoor air flow (Max.)	(CFM)		2647
Outdoor noise level	[dB(A)]		62.5
Outdoor unit			
Dimension (WxDxH)	(inch)	37.48x16.34x52.48	
	(mm)	952x415x1333	
Packing (WxDxH)	(inch)	43.11x19.49x58.27	
	(mm)	1095x495x1480	
Net/ Gross weight	(lbs.)	217.15/248.24	
	(kg)	98.5/112.6	
Accessories			
Adaptor (7/8" to 3/4")	Qty		1

Indoor unit dimension(internal pump)

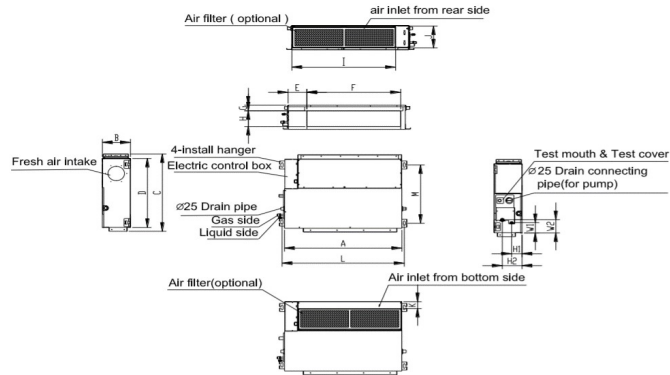

Model (KBTuh)	unit	A	B	C	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
9/12	mm	700	200	506	450	137	537	30	152	599	186	50	741	360	84	140	84	84
	inch	27.6	7.9	19.9	17.7	5.4	21.1	1.2	6.0	23.6	7.3	2.0	29.2	14.2	3.3	5.5	3.3	3.3
18	mm	880	210	674	600	140	706	50	136	782	190	40	920	508	78	148	88	112
	inch	34.6	8.3	26.5	23.6	5.5	27.8	2.0	5.4	30.8	7.5	1.6	36.2	20.0	3.1	5.8	3.5	4.4
24	mm	1100	249	774	700	140	926	50	175	1001	228	5	1140	598	80	150	130	155
	inch	43.3	9.8	30.5	27.6	5.5	36.5	2.0	6.9	39.4	9.0	0.2	44.9	23.5	3.1	5.9	5.1	6.1
36	mm	1360	249	774	700	140	1186	50	175	1261	228	5	1400	598	80	150	130	155
	inch	53.5	9.8	30.5	27.6	5.5	46.7	2.0	6.9	49.6	9.0	0.2	55.1	23.5	3.1	5.9	5.1	6.1
48	mm	1200	300	874	800	123	1044	50	227	1101	280	5	1240	697	80	150	185	210
	inch	47.2	11.8	34.4	31.5	4.8	41.1	2.0	8.9	43.3	11.0	0.2	48.8	27.4	3.1	5.9	7.3	8.3

Outdoor unit dimension

