



Wells HVAC Supply
930 W 21st St, Chicago, IL 60608
Tel: (312) 800-8455
Website: www.wellshvacsupply.com

SUBMITTAL DATA SHEET

AHU Heat Pump System

Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit #: _____
Drawing #: _____

Inquiry: sales@wellshvacsupply.com

Set Code 22023110000949
Indoor unit code 22023111000310
Outdoor unit code 22022016015900

Set Model
Indoor unit model WMA-18HFMAH
Outdoor unit model WSA-18HFMO

Certified

AHRI



UL



SYSTEM PERFORMANCE DATA

Power supply		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
Electrical		
Minimum circuit ampacity(Outdoor)	(A)	20.0
Max.fuse(Outdoor)	(A)	25.0
Connection wiring		14AWG*4
Cooling		
Capacity	(Btu/h)	18000(8600~20000)
Power Input	(W)	1538(280~1900)
Current	(A)	9.1(1.9~8.5)
SEER2	(Btu/W)	17.6
EER2	(Btu/W)	11.7
Heating		
Capacity	(Btu/h)	19000(9000~21000)
Power Input	(W)	1643(480~1920)
Current	(A)	9.3(2.1~8.5)
HSPF2-4	(Btu/W)	9.6
HSPF2-5	(Btu/W)	8.1
COP	W/W	3.39
Heat at 17F(H32)	(Btu/h)	15400
Heat at 5F(H42)	(Btu/h)	17000
COP at 5F(H42)	W/W	2.00

REFRIGERANT PIPE DATA

Throttle type	Indoor unit	N/A
	Outdoor unit	EXV
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	65.26
Refrigerant precharge	(ft)	25.0
	(m)	7.5
Additional charge for each ft	(oz/ft)	0.16
Additional charge for each m	(g/m)	15.0
Liquid side/ Gas side(indoor)	(inch)	1/4"/1/2"
	(mm)	6.35/12.7
Liquid side/ Gas side(outdoor)	(inch)	1/4"/1/2"
	(mm)	6.35/12.7
Max. pipe length	(ft)	98.4
	(m)	30.0
Max. difference in level	(ft)	65.6
	(m)	20.0
Connection method		Flared
Indoor(cooling)	(Deg. °F)	60 ~ 90
	(Deg. °C)	16 ~ 32
Indoor(heating)	(Deg. °F)	32 ~ 86
	(Deg. °C)	0 ~ 30
Outdoor(cooling)	(Deg. °F)	-22 ~ 122
	(Deg. °C)	-30 ~ 50
Outdoor(heating)	(Deg. °F)	-22 ~ 75
	(Deg. °C)	-30 ~ 24


INDOOR UNIT DATA

Indoor fan motor		
Model		ZKFD-250-8-1
Qty		1
Input	(W)	/
Output	(W)	/
RLA	(A)	2.0
Speed(Hi/Mi/Lo)	(r/min)	/
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	617.65/576.47/529.41/488.24
Indoor noise level (Hi/Med/Lo)	[dB(A)]	39/37/35
Dehumidification	(L/H)	1.77
Indoor unit		
Dimension (WxDxH)	(inch)	21.02x17.52x45.00
	(mm)	534x445x1143
Packing(WxDxH)	(inch)	26.57x20.87x48.62
	(mm)	675x530x1235
Net/Gross weight	(lbs.)	106.70/127.21
	(kg)	48.4/57.7

OUTDOOR UNIT DATA

Compressor		
Type		Twin-ROTARY
Model		KTM240D43UKT
Brand		GMCC
Capacity	(Btu/h)	25931
Input	(W)	2045
Rated current (RLA)	(A)	14.25
Refrigerant oil/oil charge	(ml)	ESTER OIL VG74 620
Outdoor fan motor		
Model		ZKFN-80-8-3
Qty		1
Input	(W)	/
Output	(W)	80
RLA	(A)	0.8
Speed	(r/min)	810/720
Air flow & Noise level		
Outdoor air flow (Max.)	(CFM)	1765
Outdoor noise level	[dB(A)]	59.0
Outdoor unit		
Dimension (WxDxH)	(inch)	35.04x13.46x26.50
	(mm)	890x342x673
Packing (WxDxH)	(inch)	39.17x15.67x29.13
	(mm)	995x398x740
Net/ Gross weight	(lbs.)	100.97/108.03
	(kg)	45.8/49

Indoor unit dimension

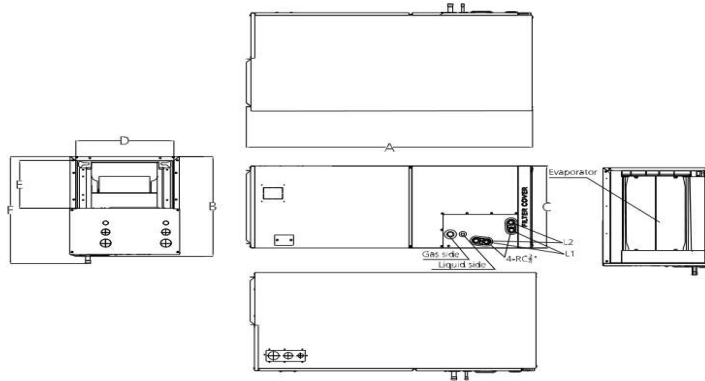

Model	Unit	Dimensions(mm)						Drain hole	
		A	B	C	D	E	F	L1	L2
18k-24k	mm	1143	534	445	400	260	585	Main drain	Overflow drain
	inch	45	21	17-1/2	15-3/4	10-1/4	23		
30k-48k	mm	1245	534	534	490	260	585		
	inch	49	21	21	19-5/16	10-1/4	23		
60k	mm	1346	534	622	580	260	585		
	inch	53	21	24-1/2	22-7/8	10-1/4	23		

Outdoor unit dimension

