



TOSOT

T-UNIX

TOSOT

DC DIRECT DRIVE AIR HANDLER

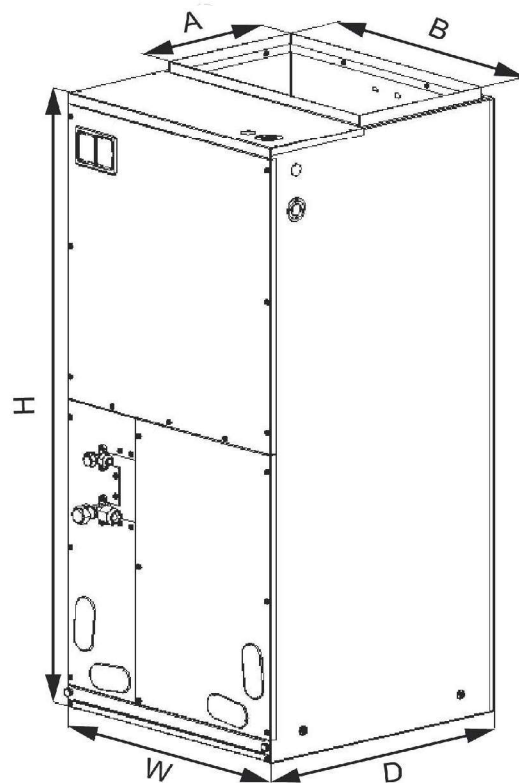
Model:
TUD36-24AH2ADU



Air Handler		
Model		TUD36-24AH2ADU
Performance		
Cooling Rated Capacity	Btu/h	36,000
Heating Rated Capacity	Btu/h	36,000
Airflow	cfm	1000
Sound Rating	dB(A)	49
Electrical		
Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
Voltage Range	V	187~253
MCA	A	4
MOP	A	15
Control Voltage	V	24
Blower Motor		
Type		DC Direct Drive
Speed Max	rpm	820
Power Output	hp	1/2
Full Load Amp(FLA)	A	3
Blower		
Type		Centrifugal
Wheel Diameter	in	10-1/4
Wheel Height	in	9-11/16
Filter, Coil and Refrigerant		
Disposable Filter Size	in	18 x 20 x 1
Coil Area	sq ft	4.09
Fins per Inch(FPI) - Rows		16 - 4
Expansion Valve	Qty	1
Refrigerant Type		R410A
Pipe Connection Size - Liquid	in	3/8
Pipe Connection Size - Suction	in	3/4
Pipe Connection Type		Flare or Solder
Condensate Drain Size	in	1
Dimension and Weight		
Dimensions(W x D x H)	in	21-1/4 x 21-1/4 x 48-1/4
Net Weight	lb	157

Job Name:		Date:	
Reference #:			
Signature:			

TOSOT NORTH AMERICA
 930 W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM

**TOSOT****T-UNIX****TOSOT****DC DIRECT DRIVE AIR HANDLER**

Model #	Dimensions				
	W	D	H	A	B
TUD36-24AH2ADU	21-1/4"	21-1/4"	48-1/4"	11-5/8"	20"

**TOSOT NORTH AMERICA**

930 W 21ST STREET, CHICAGO IL 60608

TEL: +1(312)800-8455

EMAIL: SALES@TOSOT-NA.COM